


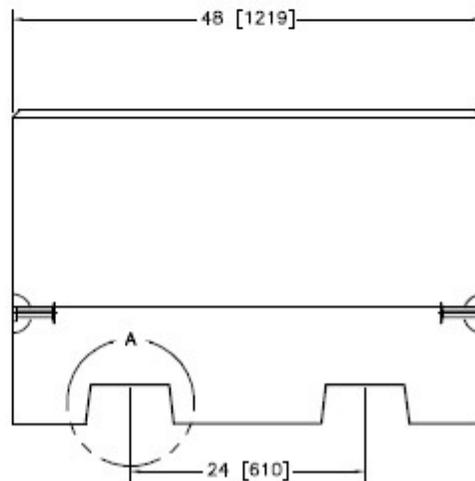


# Stephens n's

RENTAL SERVICES

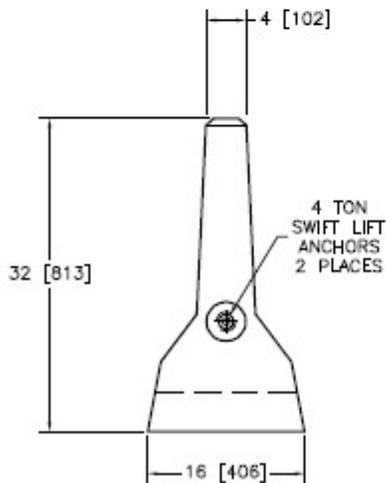

DETAIL A  
SCALE 2:1

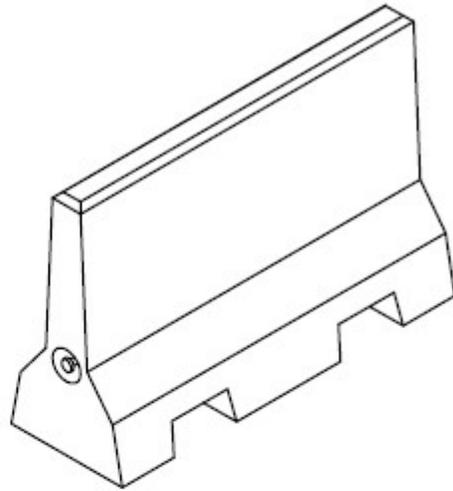

- Weight: 430KG (948Lbs)
- Concrete: 35 MPA @ 28 DAYS - 5-8% AIR ENTRAINMENT
- Reinforcing: REINFORCING BAR TO CSA G30.18. ALL REINFORCING BAR HAS 1 [25] MINIMUM COVER STRUCTURAL MACRO FIBER
- Note: This drawing is not to scale
- Meets TSSA requirements for propane tank protection from vehicular impact with maximum spacing of 54" between