

ZOOMLION

CRAWLER SCISSOR LIFTS

ZS1532C/ZS2242C

Comply with ANSI/CSA Standard

HIGHLIGHTS

High Performance

- ▶ Rubber crawler provides small ground pressure and great obstacle crossing ability
- ▶ Pivot steering with good maneuverability
- ▶ Simple single handle control for steering and walking
- ▶ Work height of 8.8m with high working efficiency (ZS0610C only)

Cost-Effectiveness

- ▶ Knuckles lubrication-free and maintenance-free
- ▶ AC motor full lifecycle maintenance-free


FEATURES

Standard Features

Proportional controls	Over tilt protective system
All motion alarm	Hour meter
Fold-down handrails	Extension deck (unidirectional)
Flashing beacon	Charging protection system
Self-closing entry gate	Scissor maintenance prop
Autobrake system	Forklift pockets
Emergency descent system	Load sensing system
Emergency stop button	AC power to platform
On-board diagnostic	Horn

Accessories & Options

- ▶ Platform work lights
- ▶ Air line to platform
- ▶ Overhead protection bar
- ▶ Low-temperature hydraulic oil
- ▶ Synthetic biodegradable hydraulic oil

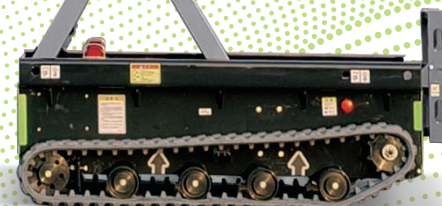

ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353680-0086(731)-88250971
E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

MAIN SPECS OF CRAWLER SCSSIOR LIFTS

ZS1532C/ZS2242C

Comply with ANSI/CSA Standard

Model	ZS1532C	ZS2242C
Size		
Work Height	21ft 4in	28ft11in
A Platform Height-Elevated	14ft 9in	22ft4in
B Platform Height-Stowed	3ft 3in	3ft 8in
C Platform Length	4ft 3in	6ft4in
D Platform Width	2ft 4in	3ft1in
Platform Extension	2ft	3ft
E Overall Height (Rails Up)	6ft 11in	7ft5in
Overall Height (Rails Down)	5ft 9in	5ft10in
F Overall Length	4ft 9in	6ft1 1in
G Overall Width	2ft 8in	3ft5in
H Ground Clearance	3in	4.5in
Performance		
Platform Capacity	530lb	550lb
capacity on Deck Extension	220lb	250lb
Max. Number of Workers	1/0	2/1
Drive Speed (Stowed)	1.25mph	1.25mph
Drive Speed (Raised)	0mph	0mph
Turning Radius	0in	0in
Drive Motor	2×0.77KW	2×1.8KW
Up/Down Time	23s/25s	34s/30s
Gradeability	25%(14°)	30%(17°)
Max. Working Slope (Lateral/Vertical)	1.7°/1.7°	2°/2°
Drive	Rear Wheels	Rear Wheels
Brake	Rear Wheels	Rear Wheels
Power		
Battery	2×12V104Ah (FULLRIVER) 2×12V/115Ah (QUIMO)	4×6V/220Ah (HOPPECKE) 4×12V/270Ah (QUIMO)
Charger	24V/30A	24V/30A
Weight		
Gross	1975lb	3750lb

