


NK - HEAVY DUTY HIGH HEAD PUMP

Heavy duty, single phase high head pumps capable of handling abrasive materials with minimal wear.

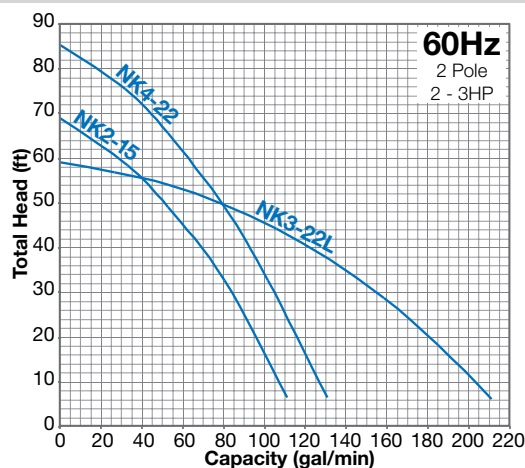

NK2-15

NK2-15 • NK4-22/3-22L Features

- Terminal board for voltage reconnect allows for change from 110V to 220V (NK2-15 only)
- NK2-15 & NK4-22: Semi Vortex Impeller and Synthetic Rubber Wear Plates for maximum durability and maintaining pump performance
NK3-22L: Semi-Open Impeller
- Dual Inside Mechanical Seal With SiC faces provides longer operational life
- Oil Lifter provides lubrication of the seal faces (Patent)
- V-Ring Seal design protects mechanical seal from abrasive particles

Optional Accessories - See page 28-31

- TS-303 & TS-304 Float Switch for automatic operation
- Sand kit • 2" NPT coupling • Control panel
- Discharge hoses • Quick connect fittings

Certified by Intertek Testing Service to UL and CSA standards for submersible construction pumps.

Model	Motor Output (HP)	Phase	Discharge Bore (inch)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Shipping Weight (lbs.)
					Diameter	Height		
NK2-15	2	Single	3	32	9 7/16	24 1/2	3 1/4	80
NK4-22	3	Single	3	32	9 9/16	24 3/16	3 1/4	81
NK3-22L	3	Single	3	32	9 1/4	26 1/2	4 3/4	90