


## SPECIFICATION SHEET

**Product: 40KW On-Site Electric Heater**

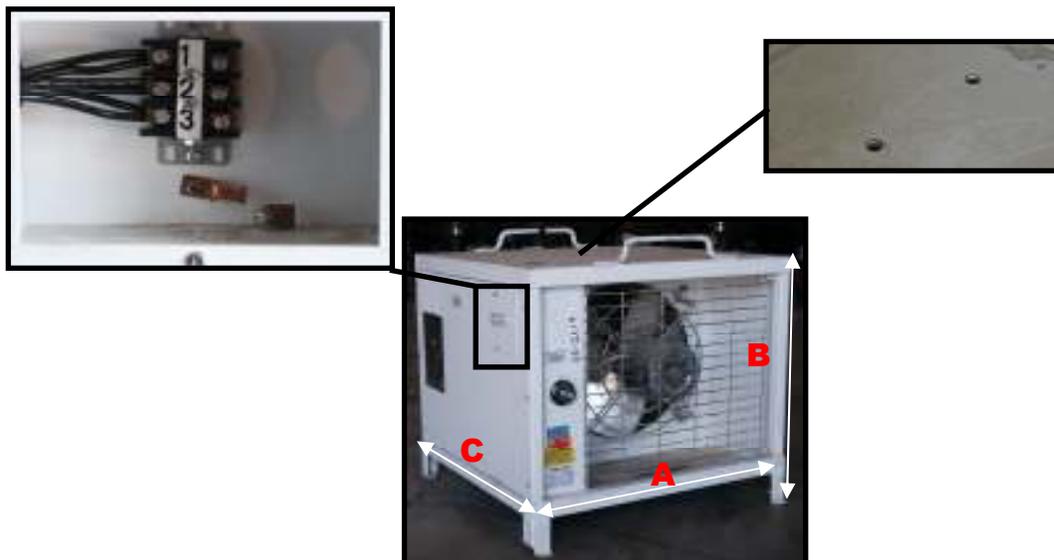

### **Features**

- **Output: 40 KW**
- **Input: 3 phase, 600V, 40 A**
- **Temp. Rise: 44°C, 80°F**
- **Flow Rate: 1500 C.F.M**
- **Weight: 50 Kg ~ 110 lbs.**
- **Size: A= 24"/61 cm, B= 22"/56 cm, C= 22"/56 cm**
- **Motor RPM: 1550**
- **Motor HP: 1/10 HP**
- **Terminal block for 600V direct connection**
- **2 Mounting holes – 3/4" x 10 UNC**
- **Thermostatically controlled**
- **Phosphate coated 18 gauge steel for rust protection**
- **Tubular heating elements**
- **Permanently lubricated motors**
- **Overheat protection**
- **Motors mounted outside element bundle**