



Contractor Tools

Chipping Hammers




Toku's TH & TCH Series super duty Chipping Hammers are designed to withstand the toughest use in foundries, refineries, shipyards and all construction and demolition environments. Complete with the harder hitting ring valve design, forged steel handle and heat treated cylinder for years of trouble free use. Oval collar retainer is standard.

TOKU 



THH-3B
THH-4B

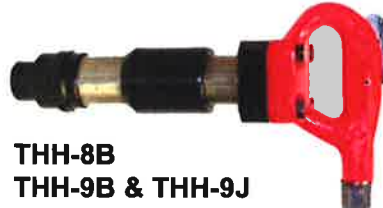

THH-8B
THH-9B & THH-9J

The THH-9J matches the maximum allowed on the new Ministry Specification (Ontario) for partial removal bridge deck work, for the most power possible.




THA-3B
c/w Anti-Vibration Handle



THH-8BT
THH-9BT & THH-9JT

The T-handle Chipping Hammers are ideal for all floor applications where a Breaker or Buster are just too large for the job.

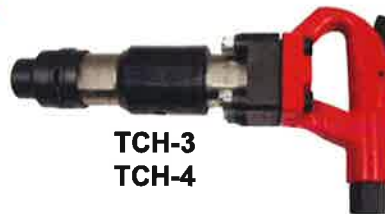

TCH-3
TCH-4

Working pressure for all tools - 90 psi. Available in Hex or Round Shank. Specify when ordering.

Specifications:

Model	Piston Diameter	Piston Stroke	Weight	Impact Rate	CFM Required	Length	Hose Size	Air Inlet (NPT)
THA-3B	1-1/8" / 28.54 mm	2-1/2" / 64 mm	16 lbs. / 7 kgs.	2,200	31.8	15"	1/2"	7/8"-24
THH-3B	1-1/8" / 28.54 mm	2-1/2" / 64mm	15 lbs. / 6.8 kgs.	2,200 bpm	31.8	17-3/4"	1/2"	3/8"/7/8"
THH-4B	1-1/8" / 28.54 mm	4-1/32" / 102 mm	16.1 lbs. / 7 kgs.	1,800 bpm	33.25	18-29/32"	1/2"	3/8"/7/8"
THH-8B	1-1/8" / 28.54 mm	3-1/32" / 77 mm	19.8 lbs. / 9 kgs.	1,900 bpm	28.2	16-5/8"	1/2"	7/8"-24
THH-9B	1-1/8" / 28.54 mm	4-1/2" / 115 mm	22 lbs. / 10 kgs.	1,500 bpm	26.5	18-1/2"	1/2"	7/8"-24
THH-9J	1-1/8" / 28.54 mm	4" / 102 mm	19.8 / 9 kgs	1,500 bpm	28.2	17-7/10"	1/2"	7/8"-24
TCH-3	1-1/8" / 28.54 mm	2-1/2" / 64 mm	19 lbs. / 8.55 kgs.	2,200	31.5	16"	1/4"	7/8"-24
TCH-4	1-1/8" / 28.54 mm	4" / 102 mm	20 lbs. / 9 kgs.	1,800	33.25	17"	1/4"	7/8"-24

Model	Piston Stroke	Weight (Less Handle)	Weight (Inc. Handle)	Impact Rate	CFM Required	Length	Hose Size	Air Inlet (NPT)
THH-8BT	3-1/2" / 77 mm	11 lbs. / 5 kgs.	25 lbs. / 11.3 kgs.	1,900 bpm	26.5	33"	1/2"	7/8"-24
THH-9BT	4-1/2" / 115 mm	12 lbs. / 5.4 kgs.	26 lbs. / 11.8 kgs.	1,500 bpm	28.2	35"	1/2"	7/8"-24
THH-9JT	4" / 102 mm	11 lbs. / 5.4 kgs.	25 lbs. / 11.3 kgs.	1,500 bpm	28.2	35"	1/2"	7/8"-24



These **Specialty Chipping Hammers** are **heavy duty** tools designed for the most demanding light-medium duty applications in foundries, shipyards, demolition and fabrication.

- Light weight, allows workers to be more productive.
- Lower noise levels.
- Precision valve allows excellent control.
- Great for overhead work.
- Excellent for use around rebar.



AA-0S



G-5R

Retainer: Hitch Cut



AA-3B

Retainer: Hitch Cut

Specify Shank Type when ordering.