


# SuperFramer®



## SN890CH2<34> drives 2" to 3-1/2" clipped head stick nails


### FEATURES

- Compact design only 12-1/2"

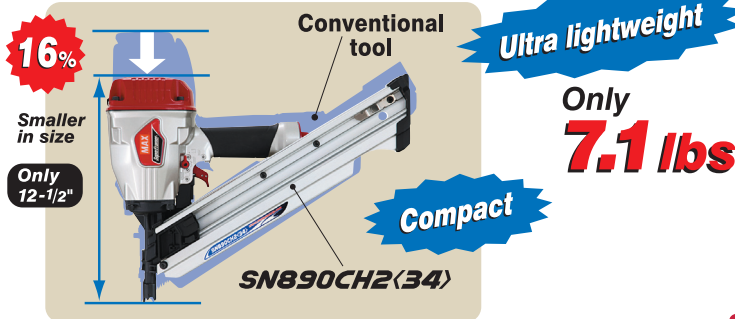

- Selective trigger system

The tool is shipped with a new design trigger system. Comes from the factory in single actuation mode. By removing the pin in the trigger, the trigger becomes anti-double fire.

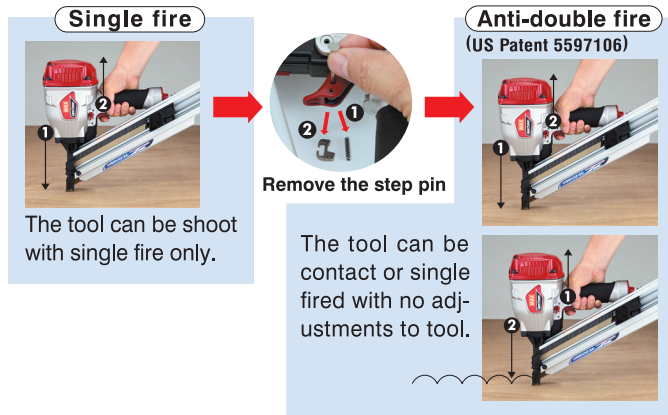

- Open Nose for easy jam clearance

Nail jam is easily cleared just remove the nail.



### APPLICATIONS

- Framing • Sheathing • Subfloors • Decking
- Siding • Crating

### TOOL SPECIFICATIONS

|                    |  |
|--------------------|--|
| MODEL              | SN890CH2<34>   |
| WEIGHT             | 7.1 lbs  |
| DIMENSIONS         | 12-1/2"(H) × 4-3/4"(W) × 17-1/8"(L)                    |
| LOAD CAPACITY      | 90 nails   |
| OPERATING PRESSURE | 70 – 100 psi (Regulator)                               |
| AIR CONSUMPTION    | 0.077ft <sup>3</sup> /cycle (90psi operating pressure) |



- Dial adjustable depth control

Dial depth control requires no special tools.





Depth guide

- Pointy teeth on contact arm

Teeth let the user get a firm grip when toe-nailing.

- Maintenance free end cap filter (US Patent 5637125)

It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.

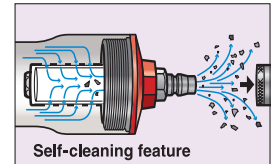


- Comfortable rubber grip

### FASTENERS APPLICABLE



34 degree  
Clipped head  
stick nails

Head diameter  
.256" – .303"



Nail length  
2" (6d)

3-1/2" (16d)

Shank diameter  
.113" – .131"

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



### MAX USA CORP.

257 East 2nd Street Mineola, New York 11501  
Phone: 800-223-4293 Fax: 516-741-3272  
www.maxusacorp.com

Dealer: