

SVL

KUBOTA COMPACT TRACK LOADER SVL75-3


Kubota Performance, Comfort and Reliability allow you to work faster, longer and more efficiently.



Specifications

Model		SVL75-3		
Type of operator station		Open CAB / Closed CAB		
Engine	Model	V3307-TE5A		
	Output (SAE J1995 gross)	HP (kW)/rpm	74.3 (55.4) / 2400	
	Output (SAE J1349 net)	HP (kW)/rpm	73.2 (54.6) / 2400	
	Displacement	cu.in. (cc)	203.2 (3331)	
	Cylinders		4	
	Bore x Stroke	in. (mm)	3.7 (94) x 4.7 (120)	
	Aspiration		Turbocharged	
Loader Performance	Rated operating capacity-35% tipping load	lbs. (kg)	2490 (1129)	
	Rated operating capacity-50% tipping load	lbs. (kg)	3557 (1613)	
	Tipping load	lbs. (kg)	7112 (3226)	
	Breakout force	Bucket	lbf. (kg)	6191 (2808)
		Lift arm	lbf. (kg)	4723 (2142)
	Lift arm path		Vertical	
Undercarriage	Track Width	in. (mm)	15.8 (400)	
	Ground pressure	psi	4.7 / 4.8	
	Track rollers (per side)		4	
	Track ground contact length	in. (mm)	56.5 (1436)	
	Travel speed	Low	mph (km/h)	5.6 (9.0)
		High	mph (km/h)	8.6 (13.7)
	Traction force	lbf. (kgf)	9678 (4390)	
Min. ground clearance	in. (mm)	11.7 (296)		
Hydraulic system	Aux. hydraulic flow	Std. / High Flow gpm (ℓ/min.)	19.2 (72.7) / 29.8 (112.8)	
	Aux. hydraulic pressure	psi (kgf/cm ²)	3185 (224.0)	
Service refill capacities	Hydraulic system	gal. (ℓ)	12.2 (46)	
	Hydraulic tank	gal. (ℓ)	4.3 (16.1)	
	Fuel tank	gal. (ℓ)	25.0 (94.6)	
Operating weight (Includes operator weight 165lbs.)		lbs. (kg)	9190 (4169) / 9420 (4273)	

Dimensions

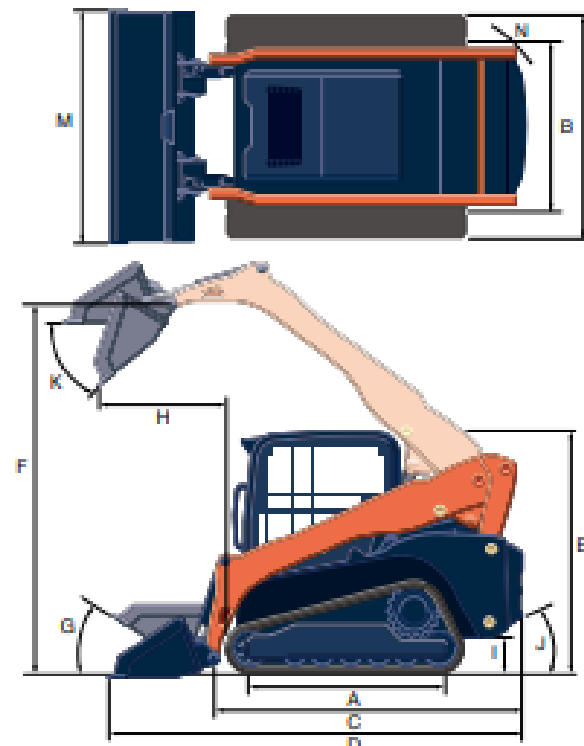

Model		SVL75-3	
A	Length of track on ground	in. (mm)	56.5 (1436)
B	Track gauge	in. (mm)	53.3 (1355)
C	Length w/o bucket	in. (mm)	112 (2844)
D	Length w/bucket on ground	in. (mm)	142.1 (3609)
E	Height to top of cab	in. (mm)	81.8 (2078)
F	Bucket hinge pin height at max. lift	in. (mm)	122.7 (3117)
G	Rollback angle at carry position	degree	27
H	Reach at max. lift and dump	in. (mm)	39.6 (1007)
I	Ground clearance	in. (mm)	11.7 (296)
J	Departure angle	degree	31.1
K	Max. dump angle	degree	38.5
L	Vehicle width	in. (mm)	69.1 (1755)
M	Width with bucket	in. (mm)	68 (1727)
N	Turning radius from center-machine rear	in. (mm)	57.8 (1468)