


**Item # 1066FS, Oscar 1066FS - 50Amp - 5-20 Duplex - Outdoor**



- 50 Amp - NEMA 5-20 Straight Duplex Receptacles
- Indoor and Outdoor Models available
- Plug & play temp power center with GFCI protection
- Rugged built for construction and MRO jobsites
- Great for outdoor events from carnivals to car shows
- Circuit breaker and Class A GFCI protected circuits
- All steel construction for use job after job
- Powder coated inside and out to prevent corrosion
- 50A 125/250V 4W Input with feed through for "daisy chaining"
- (6) 5-20R Duplexes and (1) L6-30 receptacles w/o flip covers
- Field repairable by qualified electrician
- Approx 25 lbs each
- Approx 11.75"H x 22.5"L x 15"W

1066 Series- Indoor use models  
 1066FS Series - Outdoor Use models

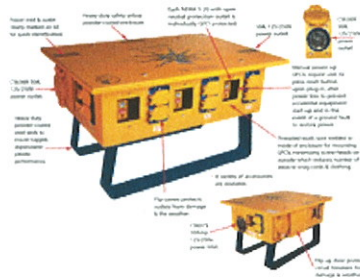

**SPECIFICATIONS**

Voltage	125 V 250 V
Power Inlet	CS6375
Power Outlet	CS 6369

Power Outlet Voltage	125 V 250 V
Current	50 A
Listings	ETL Listed to UL 1640
Environmental/ NEMA Rating	Nema 3R
Enclosure	Powder Coated
Type (20 Amp Receptacles)	5-20 Duplex
Current (20 Amp Receptacles)	20 A
Voltage (20 Amp Receptacles)	125 V
Quantity (20 Amp Receptacles )	6
GFCI Protection (20 Amp Receptacles)	Yes
Flip Covers (20 Amp Receptacles)	Yes
Type (30 Amp Receptacles)	L6-30
Current (30 Amp Receptacles)	30 A
Voltage (30 Amp Receptacles)	250 V
Quantity (30 Amp Receptacles)	1
GFCI Protection (30 Amp Receptacles)	No
Flip Covers (30 Amp Receptacles)	Yes
Power Inlet Voltage	125 V 250 V
Power Inlet Current	50 A
Power Inlet (Flip Cover)	No
Power Outlet Current	50 A
Power Outlet (Flip Cover)	Yes
Circuit Breaker Protection (20 Amp Receptacles)	Yes
Circuit Breaker Protection (30 Amp Receptacles)	Yes