

STANDARD FEATURES

EPOXY LINED DELI-VESSEL

- Epoxy lined approved deli-vessel with 200 PSI maximum pressure.

FRL PACKAGE



- Filter / Regulator / Lubricator combos.

SIGHT GLASS



- Ensure peak dryer performance by maintaining sufficient desiccant levels. (Never let desiccant fall below the sight glass window.)

TEMPERATURE GAUGE



AFTERCooler




- Industrial, air motor driven after cooler.

COALESCING FILTER



- Dry-Pro™ high efficiency coalescing filter removes all oil contaminants.

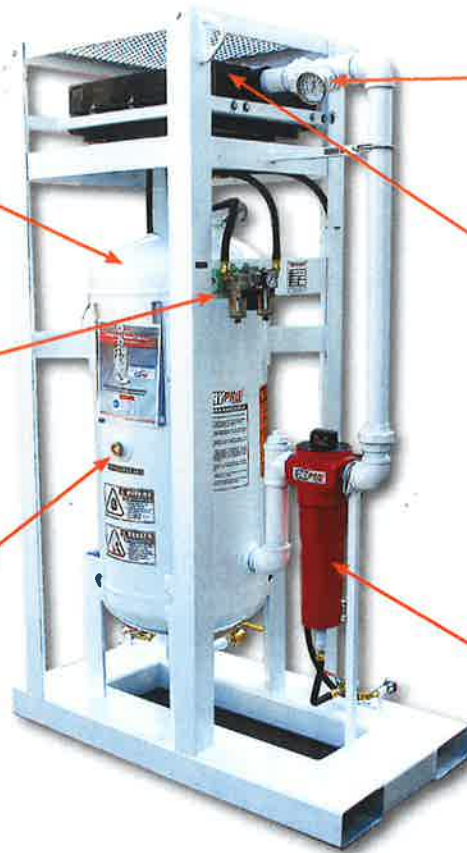

Custom Blast Pot / Dryer Skid Combos



Additional Features / Benefits:

- Rugged heavy duty construction
- Full load lifting eyes / fork pockets
- Operates in sub zero temperatures
- Low maintenance and operating cost
- Compact design, smaller footprint
- Pressure relief valve (150 PSI)
- CRN Registered Vessel, U Stamped, National Board Certified, ABSA Certified (Alberta) - 1000, 1200 & 1600 CFM models only, AS1210 Registered (Australia)

Ordering Information:



DESICCANT
(50 lb. / bag)
Stock # 79000

MODEL	WIDTH	LENGTH	HEIGHT	WEIGHT	DESICCANT REQ'D
DSV250	23"	48"	75"	661 lbs	200 LBS
DSV450	26"	48"	78"	811 lbs	300 LBS
DSV750	36"	54"	85"	1200 lbs	400 LBS
DSV1000	44"	68"	93"	1890 lbs	1000 LBS
DSV1200 (special order)	44"	68"	93"	2040 lbs	1200 LBS
DSV1600	44"	68"	95"	2170 lbs	1250 LBS

Distributed By:

MOD-U-BLAST

403 - 69 Avenue
Edmonton, Alberta
T6P - 0C2

Ph: (780) 466-5085

Fax: (780) 465-7317

Service: (780) 425-5510

Email: info@modublast.com