



# DIRECT FIRED CONSTRUCTION HEATERS

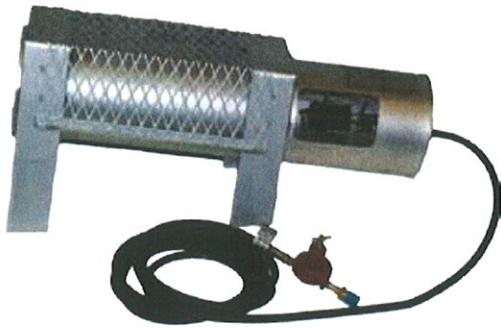

**F-150**

Adjustable heat from 50,000 to 150,000 btuh

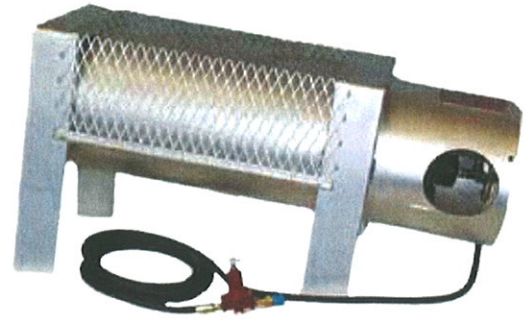

**F-375**

Adjustable heat from 220,000 to 375,000 btuh

MODEL	F-150	F-375
Fuel	Vapor Propane	Vapor Propane
Heat Capacity	Max 150,000 btuh Min 50,000 btuh	375,000 btuh 220,000 btuh
Manifold Pressure	2-1/4 to 20 PSI	7 to 20 PSI
Hose Length	20ft is standard	20ft is standard
Regulator With POL	Adjustable to 20 PSI max.	Adjustable to 20 PSI max.
Approval	UL of Canada Listed	UL of Canada Listed
Weight	32 lbs	65 lbs
L x W x H	30" x 11.25" x 14"	42" x 17" x 22"
Air Outlet	8" Diameter	13" Diameter
Fuel Consumption	2.3 to 6.9 lbs/hr	10.1 to 17.3 lbs/hr
Ignition	Manual	Manual
Optional Fan	N/A	800 CFM fan assembly (120V)



2001-S2  
2 cylinder manifold



2001-S3  
3 cylinder manifold

## DEPENDABLE HEAT WHENEVER YOU NEED IT

Engineered for simple operation and minimal servicing

Light and highly portable

Stackable for easy transportation and storage

Designed to operate without a fan or electricity

Temporary heat for use during construction and maintenance

