

SAFE
TOUGH
RELIABLE



SL11E / S1500E



Portable Dual Fuel Direct Fired Heaters

SURE FLAME


1-800-661-1162

www.sureflame.ca

info@sureflame.ca

SL11E / S1500E

1,000,000 - 1,500,000 BTU/HR

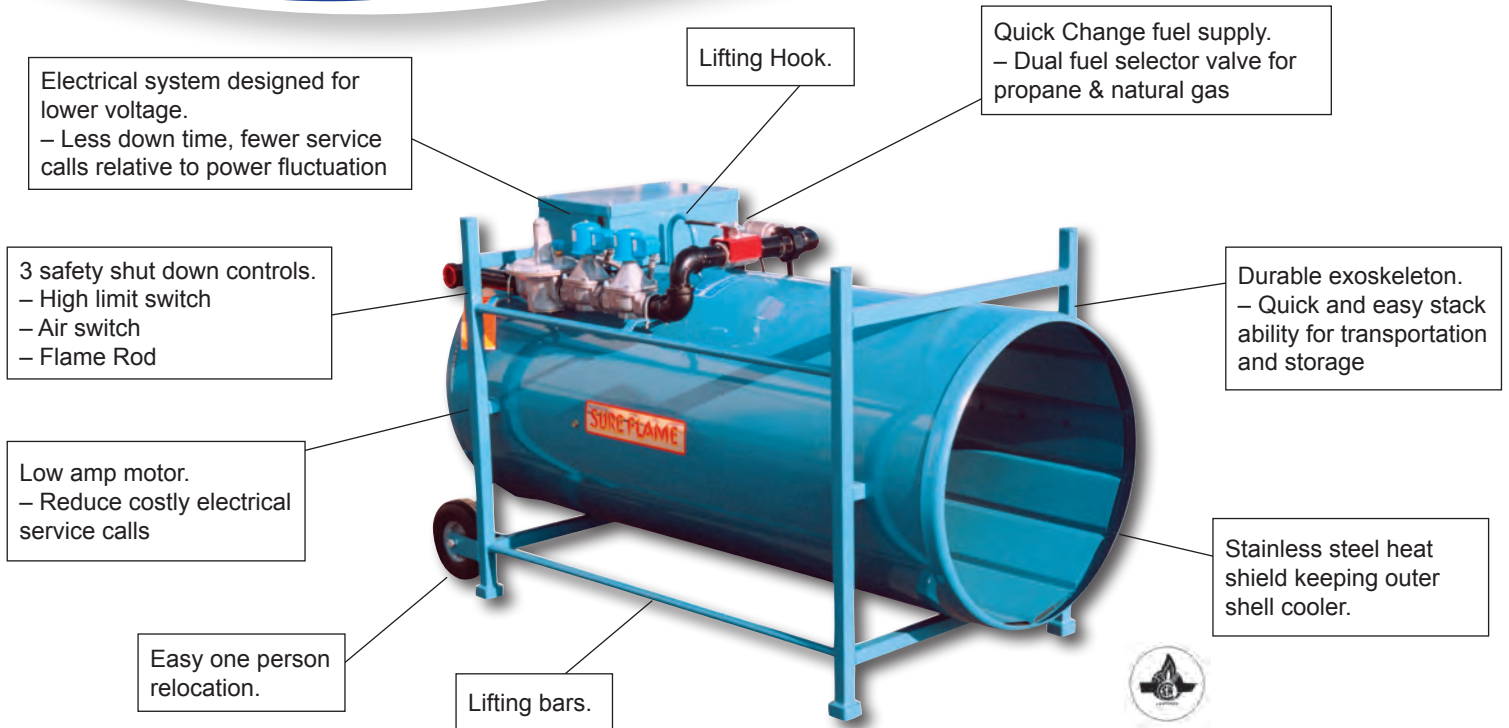

FEATURES



- **2-Stage thermostat control.**
(Std. for S1500E)
– High / Low / Off – reduced operating cost, higher fuel savings

– *Optional single stage thermostat for the SL11E



- **Potted ignition control.**
– Increased reliability & environmental element protection

SPECIFICATIONS

| | SL11E | S1500E |
|---------------------------------|--------------------------|------------------------|
| HEAT OUTPUT | 1,000,000 BTU/hr | 1,500,000 BTU/hr |
| APPROX. FUEL CONSUMPTION | | |
| Propane | 41.3 l/hr 46.3 lbs/hr | 62 l/hr 69.5 lbs/hr |
| Natural Gas | 1,000 CFH | 1,500 CFH |
| FAN RATING | 7,000 CFM * | 7,000 CFM * |
| POWER | 1HP 120V 9.4A | 1HP 120V 9.4A |
| THERMOSTAT RANGE | 4 to 38 °C (opt.) | 4 to 38 °C |
| DIMENSIONS (LxWxH) | 63" x 30.5" x 38.5" | 63" x 30.5" x 38.5" |
| WEIGHT | 285 lbs | 285 lbs |
| GAS CONNECTION | 1 1/2" NPT | 1 1/4" NPT |
| GAS SUPPLY PRESSURE | 8 - 14" WC | 8 - 14" WC |

*Actual output will depend on operating conditions.

For more information Please contact us at 800.661.1162 info@sureflame.ca