SALFE TOUGH RELIABLE




S2200D

Pressurizing, Ductable, Direct Fired Heater



\$2200D

2,250,000 BTU/HR

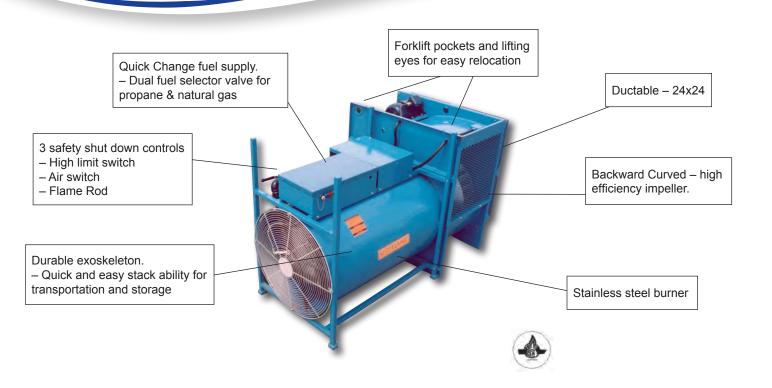

FEATURES



Use as a fan for air/heat movement.



- 2- Stage thermostat control.
 High / Low / Off reduced operating cost, higher fuel savings
- Approved for indoor & outdoor use.

 Excellent option when pressurization is the goal

SPECIFICATIONS

	S2200D
HEAT OUTPUT	2,250,000 BTU/hr
APPROX. FUEL CONSUMPTION	
Propane	92.8 l/hr
	104 lbs/hr
Natural Gas	2,250 CFH
FAN RATING	12,000 CFM *
POWER	5HP 575V 3PH 6.3A
	5HP 460V 3PH 7.8A
	5HP 208/230V 3PH 17.4/15.7A
	5HP 208/230V 1PH 25A
THERMOSTAT RANGE	4 to 38 °C
OUTLET DIAMETER	24" x 24" **
MAX. DUCT LENGTH	40'
DIMENSIONS (LxWxH)	81" x 44" x 50.5"
WEIGHT	860 lbs
GAS CONNECTION	1 1/2" NPT
GAS SUPPLY PRESSURE	1/2 - 5 PSI

- * Actual output will depend on operating conditions.
- ** Optional transitions available.

For more information Please contact us at

800.661.1162

info@sureflame.ca